


电机数据							
电机编号	573P42-5206A	573P56-5606A	573P79-5806A				
1 相电压	6.76	3.92	6.09				V
2 相电流	5.2	5.6	5.8				A
3 相电阻	1.3	0.7	1.05				Ω
4 相电感	1.1	1.1	1.3				mH
5 静力矩	45.0	90.0	150.0				N.cm
6 引出线数	6	6	6				
7 转动惯量	100.0	300.0	480.0				gcm ²
8 长度	42	56	79				mm
9 质量	0.48	0.72	1.1				kg
通用规格							
10 步距角	1.2°						
11 步距角精度	±5% (full step、no load)						
12 电阻精度	±10%						
13 电感精度	±20%						
14 绝缘电阻	500VDC 100MΩMin						
15 绝缘强度	500VAC 1 minute						
16 环境温度	-20℃-- +50℃						
17 温升	80℃ Max(rated current)						
18 轴向跳动	0.08mm Max(450g load)						
19 径向跳动	0.02mm Max(450g load)						
20 轴向最大力	15N						
21 径向最大力	75N(20mm from the flange)						
22 绝缘等级	B						

尺寸图

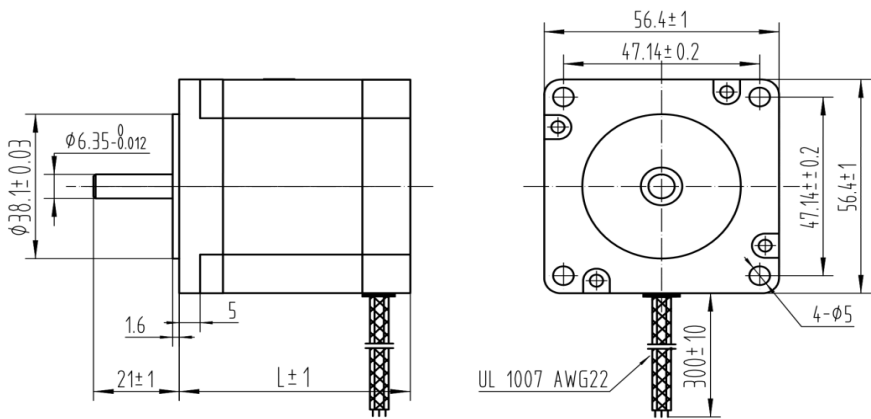

选件，电缆和连接信息

Connection Motor (UL1007 AWG22)

WHT	V
BLU	V
RED	U
ORG	U
GRN	W
YEL	W

