

## 电气额定值

1 输入电压范围	12-24VDC
2 额定电压	24VDC

## 控制接口

1 使能	High - Disable the drive; Low - Enable the drive
2 脉冲输入	<1MHz
3 方向输入	CW - High or unconnected ; CCW - Low
3 地线	Signal common end


## 通信

1 RS485	MODBUS protocol is supported based on RS485
2 GPIO 输入	Up to 4 GOIO input

## 机械规格

1 质量	
2 环境温度	-40°C --- +85°C
3 工作温度	-25°C --- +85°C

## 尺寸图

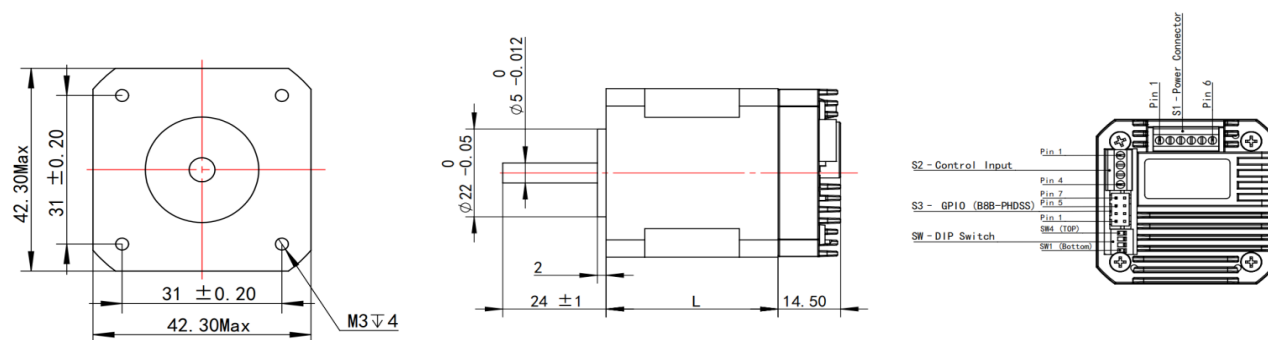

## 电缆和连接信息

## S1 Power Connector

VDC	Pin 1	GND	Pin 2
Motor B-	Pin 3	Motor B+	Pin 4
Motor A-	Pin 5	Motor A+	Pin 6

## S2 Control Input

GND	Pin 1	Pulse input	Pin 2
Direction input	Pin 3	Enable	Pin 4

## S3 GPIO (B12B-PHDSS)

5V output	Pin 1	GND	Pin 2
GPIO1	Pin 3	GPIO0	Pin 4
GPIO3	Pin 5	GPIO2	Pin 6
RS485A	Pin 7	RS485B	Pin 8