


电气额定值	
1 输入电压范围	12-24VDC
2 额定电压	24VDC
控制接口	
1 使能	High - Disable the drive;Low - Enable the drive
2 脉冲输入	<1MHz
3 方向输入	CW - High or unconnected ;CCW - Low
3 地线	Signal common end
通信	
1 RS485	MODBUS protocol is supported based on RS485
2 GPIO 输入	Up to 7 GOIO input
机械规格	
1 质量	
2 环境温度	-40°C --- +85°C
3 工作温度	-25°C --- +85°C
尺寸图	

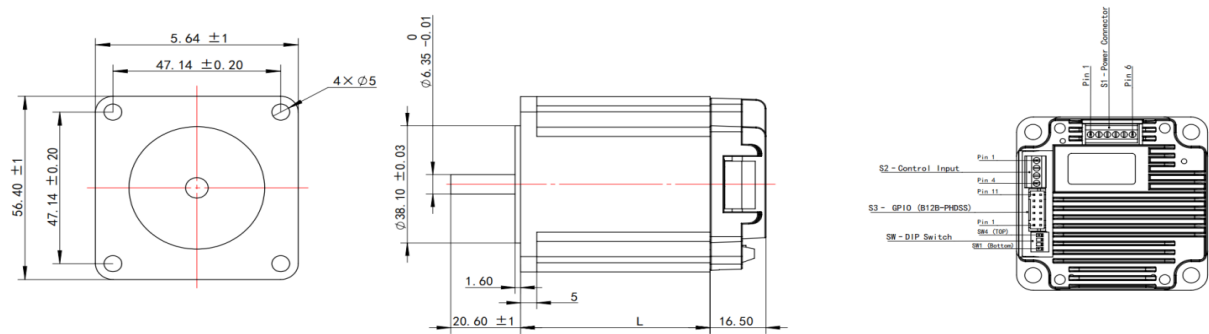

电缆和连接信息					
S1 Power Connector					
VDC	Pin 1	GND			Pin 2
Motor B-	Pin 3	Motor B+			Pin 4
Motor A-	Pin 5	Motor A-			Pin 6
S2 Control Input					
GND	Pin 1	Pulse input			Pin 2
Direction input	Pin 3	Enable			Pin 4
S3 GPIO (B12B-PHDSS)					
5V output	Pin 1	GND			Pin 2
GPIO1	Pin 3	GPIO0			Pin 4
GPIO3	Pin 5	GPIO2			Pin 6
GPIO5	Pin 7	GPIO4			Pin 8
GPIO6	Pin 9	GND			Pin 10
RS485A	Pin 11	RS485B			Pin 12